

# AD-45x2Ri

## 45-lb Capacity OPL Dryer

### Standard Features:

- 20% more efficiency
- Fast drying times
- 5 year limited warranty on parts
- 2 point roller system
- Stainless Steel fronts standard
- Stainless Steel basket standard
- Trans-axial air flow
- Single Phase Reversing Basket
- S.A.F.E. - Sensor Activated Fire Extinguishing System
- Phase 7 Micro Controls with Auto Dry
- Available in Gas only



AD-45x2Ri OPL Dryer

### Why Purchase AD-45x2Ri?

#### Performance

The Achievement: Through innovative design the i-series dryers achieve higher performance, industry leading efficiency, shorter dry times and safer, more reliable operation. What an owner wants, an owner gets: saving money on utilities and maintenance. Anyone can say their dryers have the best performance. The Intelligent Dryer Series has the features to prove it.

#### Reliability

Demanding owners require more than just outstanding performance for their toughest laundry environments. To accommodate owners, we designed the i-series with years of reliable operation as an absolute design necessity. A sturdy steel welded cabinet, fewer moving parts and top quality components are the foundation of the line. Costly repairs and unwanted down time are now a thing of the past. We are so confident that you'll enjoy years of reliable operation that we back every i-series dryer with a manufacturer's 5 year warranty.

#### Phase 7 Micro Controls with Auto Dry

ADC's Phase-7 micro control features state-of-the-art diagnostic capabilities and simple programmability. We were the first to bring computer operated dryers to the market and today continue to be the leader in applying technology to dryer operation. Phase-7 provides patented auto-dry capability in OPL mode and easy-to-read LED screens and user friendly multi-lingual interface.

Your local ADC independent authorized distributor



[www.adclaundry.com](http://www.adclaundry.com)

# AD-45x2Ri


## AD-45x2Ri Specifications

Maximum Capacity (dry weight) Per Pocket		45 lb	20.4 kg
Tumbler Diameter		32-3/4"	83.2 cm
Tumbler Depth		30"	76.2 cm
Tumbler Volume Per Pocket		14.6 cu ft	413.4 L
Tumbler / Drive Motor Per Pocket		1/3 hp	0.25 kW
Blower / Fan Motor Per Pocket		1/2 hp	0.37 kW
Door Opening (diameter)		27"	68.6 cm
Door Sill Height Top Pocket / Bottom Pocket		50.4" / 10.3"	128 cm / 26.2 cm
Dryers Per 20' / 40' Container		10 / 21	
Dryers Per 48' / 53' Truck		25 / 28	
GAS MODEL	Voltage Available	120-240V	1ø 2w 50/60 Hz
	Approximate Net Weight	640 lb	290 kg
	Approximate Shipping Weight	700 lb	318 kg
	Airflow Per Pocket	60 Hz	525 cfm
		50 Hz	440 cfm
	Heat Input Per Pocket	94,000 Btu/hr	23,688 kcal/hr
	Exhaust Connection (diameter) Per Dryer	10"	25.4 cm
	Inlet Pipe Connection Per Dryer	1/2" M.N.P.T.	
		1/2" B.S.P.T. (CE and Australia Only)	

Electrical Specs are per pocket

## Electrical Service Specifications Gas Models Only

SERVICE VOLTAGE	PHASE	WIRE SERVICE	APPROX AMP DRAW		CIRCUIT BREAKER
			60 Hz	50 Hz	
120	1ø	2	8.8	--	15
208	1ø	2	5.7	--	15
220	1ø	2	--	5.7	15
230	1ø	2	--	5.7	15
240	1ø	2	5	5.7	15

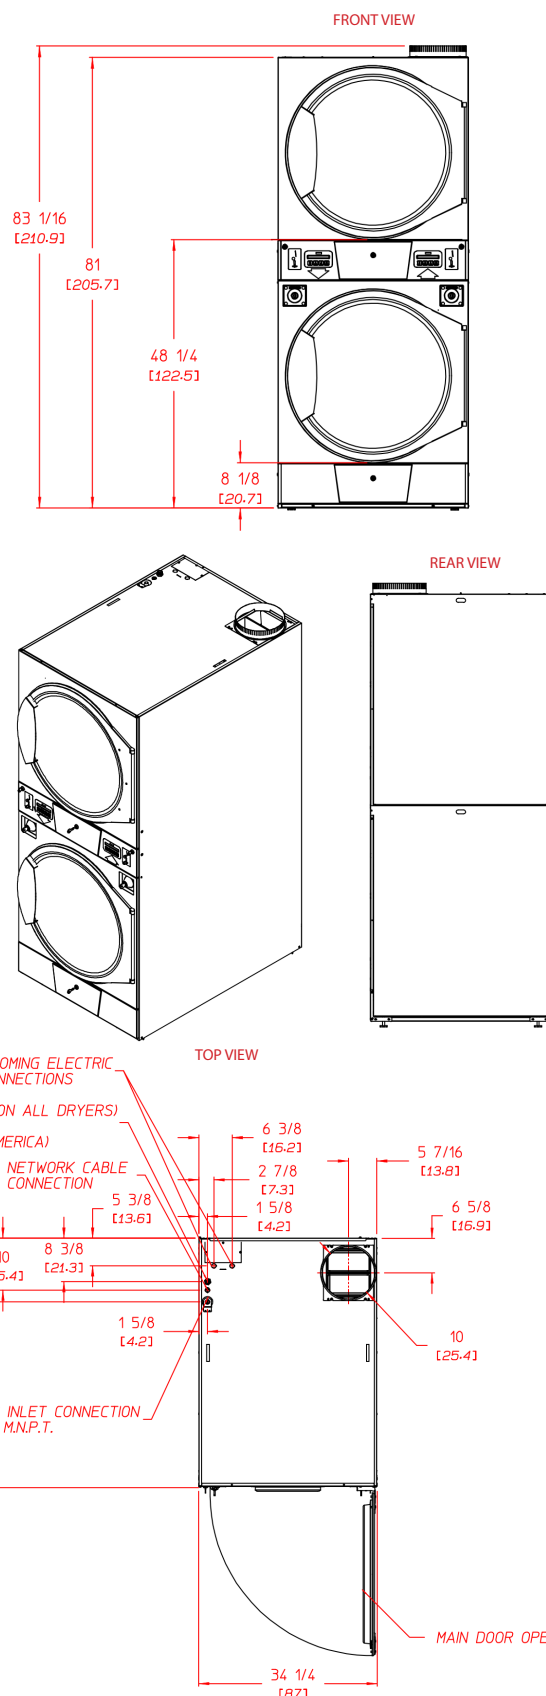

88 Currant Road Fall River, MA 02720-4781 • 508.678.9000 • Fax: 508.678.9447 • Email: sales@amdry.com

P/N 451047 4/14

www.adclaundry.com